



### The Aquasana 90-day “Pure Satisfaction” Guarantee

All Aquasana products offer a 90-day satisfaction guarantee. (A 1 year warranty is included, which covers defects in materials and workmanship.) If for any reason

you are not satisfied with your purchase, simply call us, or the dealer you purchased from, for a Return Authorization Code and a full refund will be promptly issued upon return. Thank you for choosing Aquasana!

This filter system is designed and tested for use with genuine Aquasana parts including replacement filters and all hardware. Use of parts from other manufacturers may result in loss of contaminant reduction performance, system damage or failure. Use of parts from other manufacturers will also void your warranty. Please visit [www.aquasana.com](http://www.aquasana.com) for all replacement parts.

## Water for Life.


Automatic Free-Shipping  
Filter Replacement Program

Water for Life customers receive:

- Fresh replacement filters auto delivered every 6 months
- A locked-in 15% discount and free shipping
- Extended product warranty for the duration of your membership
- Exclusive benefits, rewards, and other offers



## Rhino SimplySoft eq-SS2o Salt-Free Water Softener & Conditioner

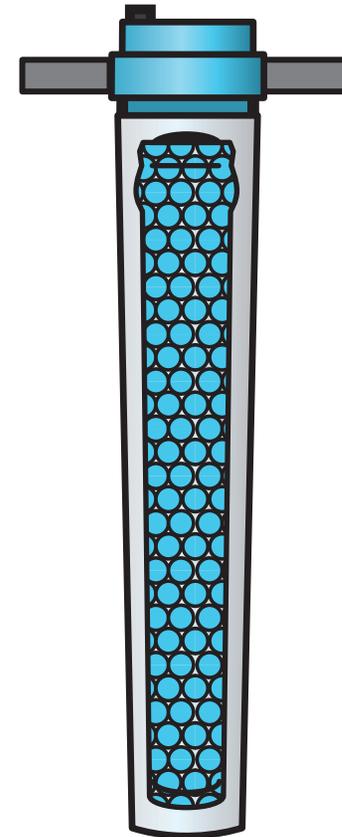

### COMPONENTS

- Rhino eq-SS2o unit
- Rhino eq-SS2oR replacement cartridge
- Installation instructions
- (2) 3” PVC nipples
- (2) Sch.8o PVC Unions
- (1) Wrench
- (1) Bracket

This product is not intended for use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the unit.

THIS UNIT MUST BE INSTALLED BY A  
LICENSED PLUMBER TO VALIDATE THE WARRANTY.

Aguasana, Inc.  
[www.aquasana.com](http://www.aquasana.com)

6310 Midway Road • Haltom City, Texas 76117  
866.662.6885 USA • 877.332.7873 Canada

Follow us for exclusive  
deals and aquasana news

[facebook.com/aquasana](https://facebook.com/aquasana)  
 [twitter.com/aquasana](https://twitter.com/aquasana)

eqSS2o\_install\_20121012

## Precautions & Operating Specifications

- Read all precautions, installation, and operating instructions carefully and completely before installing the unit.
- Do not install this filter where the line pressure may exceed 100 psi. Operating pressure range: 20 psi – 100 psi.
- The rated service flow is 7 gallons per minute; rated capacity is 50,000 gallons. Replacement unit is available at [www.aquasana.com](http://www.aquasana.com).
- Install on cold water lines only. Operating temperature range: 40° – 90°F. Protect unit from freezing.
- Do not install the unit on its side or in direct sunlight. KEEP THE UNIT IN AN UPRIGHT POSITION AT ALL TIMES.
- Filter installation must comply with state and local plumbing codes.
- Cleaning: use only warm, soapy water to clean the outside of the housing. Rinse well with fresh, clean water. Never use chemical cleaning products on the filter's exterior surface because they may damage the filter housing.

## INSTALLATION


1. Turn off water main.
- 2a. For **stand-alone** installation:  
Install the unit to the main water supply using the supplied components.
- 2b. To add to **existing** whole house filter installation:  
Install the unit to existing system as shown in the installation diagram using the supplied components.
- 2c. To include with a **new** whole house filter installation:  
Follow the installation instructions that came with your Rhino Whole House filter. Install the SimplySoft unit inline with the whole house system as shown in the installation diagram using the supplied components.
3. The SimplySoft unit must be firmly braced and supported with the bracket provided.
4. Once installation is complete, slowly turn the water on and inspect for leaks.
5. Slowly open the water faucet closest to the installed unit and allow water to run for 5-10 minutes for the final flushing period.

### Important:


Do not over tighten fittings, as this may cause leakage and broken fittings. Do NOT use pipe dope. The use of pipe dope voids the warranty. You may use NSF-certified pipe primer, glue and teflon tape. Leave two-three threads exposed and do not exceed seven layers of teflon tape. More than seven layers will cause the nipple to crack and leak.

## Installation Diagram

SimplySoft  
EQ-300 City

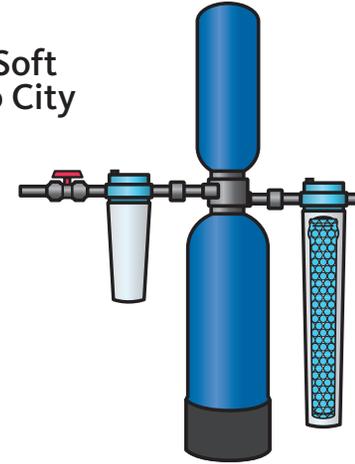

SimplySoft  
EQ-300-85 Well

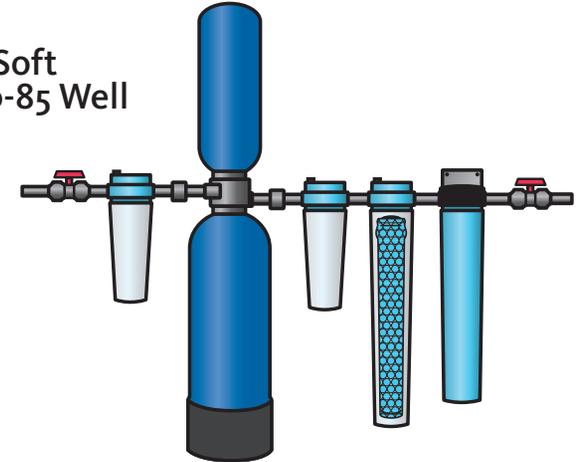

SimplySoft  
EQ-1000 Premium

